


Basic Line

Venetian blinds


Pull cord / turning rod

ZW 16 (slats 16 mm)
ZW 25 (slats 25 mm)

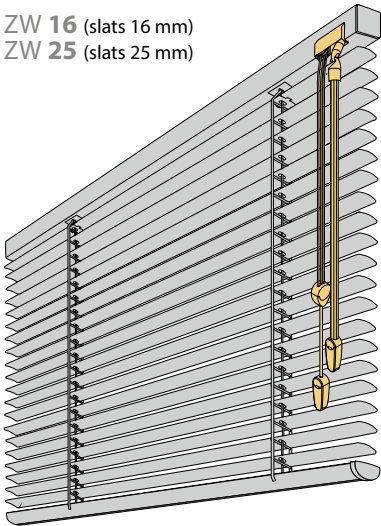


OPERATION OPTIONS


left right

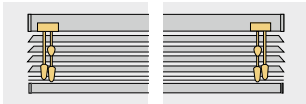

split

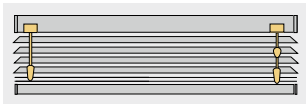


Basic Line 16

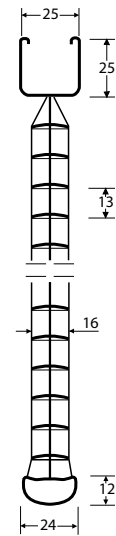

- Customization
- Slat width 16, 25 mm
- Slat thickness 0.22 mm
- Free-hanging installation with fixed top profile and adjustable bottom profile
- Operation with transparent turning rod and pull cord
- Operating side left, right or split
- Control lengths 35, 50, 75, 100, 125, 150, 175, 200, 250, 300 cm
- Colour-matched top / bottom profiles
- Colour-matched cords, plastic parts
- Lifting cord 1.4 mm
- Top fixation with wall / ceiling fixing bracket with quick-lock
- Cord guiding for an extra charge
- Option: dim-out possible

Basic Line 25

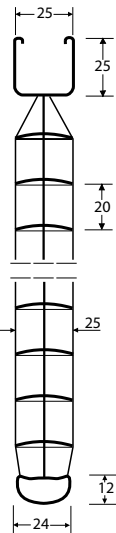

- For assembly between the two coupled sashes
- Customization
- Slat width 16, 25 mm
- Slat thickness 0.22 mm
- Free-hanging installation with fixed top profile and adjustable bottom profile
- Operation with metal turning rod (white) and pull cord
- Operating side (left or right)
- Control lengths 70, 90, 108, 133 cm
- Colour-matched top / bottom profiles
- Colour-matched cords, plastic parts
- Lifting cord 1.4 mm
- Top fixation coupled window bracket
- Cord guiding for an extra charge
- Retention of pull cord with cord cleats

RANGES OF SIZE

16 mm slats

Min. width	27 cm
Max. width	270 cm
Max. height	260 cm
Max. area	6 m ²

25 mm slats

Min. width	27 cm
Max. width	330 cm
Max. height	300 cm
Max. area	6 m ²

BUNCH HEIGHTS

16 mm slats


Installation height	Bunch height
100 cm	ca. 8.5 cm
150 cm	ca. 10.5 cm
200 cm	ca. 11.5 cm
250 cm	ca. 12.5 cm

25 mm slats

Installation height	Bunch height
100 cm	ca. 8.5 cm
150 cm	ca. 10.0 cm
200 cm	ca. 10.5 cm
250 cm	ca. 13.0 cm
300 cm	ca. 14.5 cm


Pull cord / turning rod Coupled windows

VW 16 (slats 16 mm)
VW 25 (slats 25 mm)

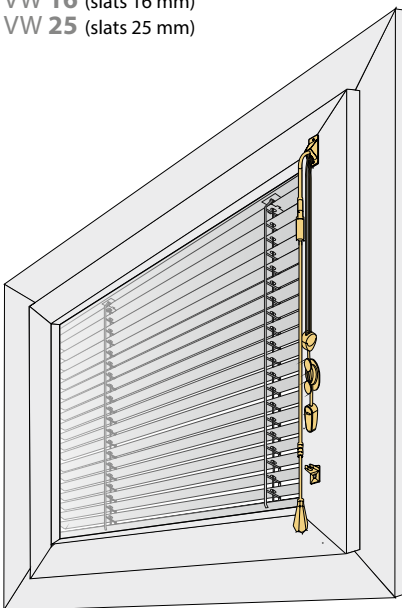

OPERATION OPTIONS

left right



RANGES OF SIZE

16 mm slats

Min. width	27 cm
Max. width	270 cm
Max. height	260 cm
Max. area	6 m ²

25 mm slats

Min. width	27 cm
Max. width	330 cm
Max. height	300 cm
Max. area	6 m ²

BUNCH HEIGHTS


16 mm slats

Installation height	Bunch height
100 cm	ca. 8.5 cm
150 cm	ca. 10.5 cm
200 cm	ca. 11.5 cm
250 cm	ca. 12.5 cm

25 mm slats

Installation height	Bunch height
100 cm	ca. 8.5 cm
150 cm	ca. 10.0 cm
200 cm	ca. 10.5 cm
250 cm	ca. 13.0 cm
300 cm	ca. 14.5 cm

Venetian Blinds Basic Line 16 Scale 1:1

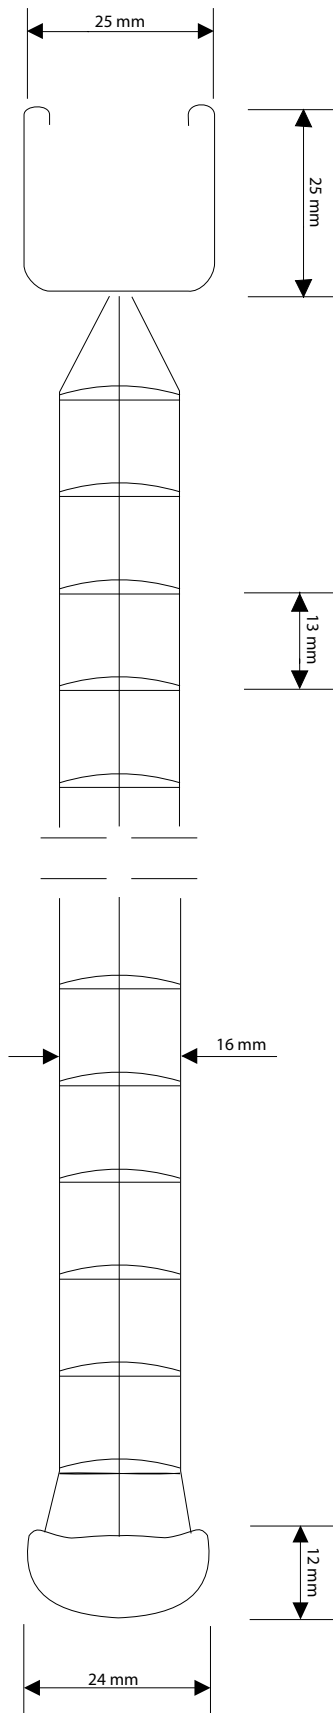


SCALE 1:1

Basic Line

Venetian blinds


Turning button / bottom profile operation

BW 16 (slats 16 mm)
BW 25 (slats 25 mm)

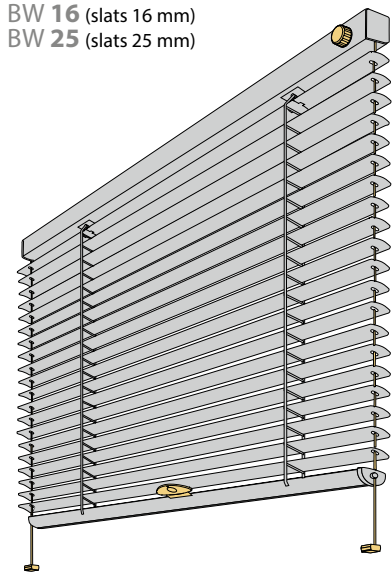


! Perforated slats are not possible for this type.


OPERATION OPTIONS



Basic Line 16

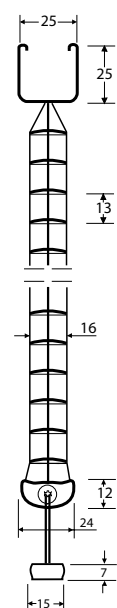

Basic Line 25

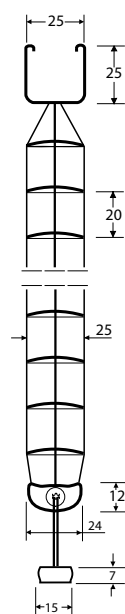

- Customization
- Slat width 16, 25 mm
- Slat thickness 0.22 mm
- Tensioned installation with fixed top profile and adjustable bottom profile
- Handle (transparent) at the bottom profile, turning button at the top profile
- Turning button and end caps white, light grey, anthracite
- Operating side left or right
- Option: turning rod
- Control lengths 35, 50, 75, 100, 125, 150, 175, 200, 250, 300 cm
- Colour-matched top / bottom profiles
- Colour-matched cords, plastic parts
- Tension cord 1.2 mm
- Top fixation with wall / ceiling fixing bracket with quick-lock
- Bottom fixation with tension cord bracket
- Plastic colours - see Flexx Line

NUMBER OF HANDLES

16 mm slats	
Installation width	Number of handles
Up to 620 mm	1
From 621 mm	2

RANGES OF SIZE

16 mm slats	
Min. width	27 cm
Max. width	150 cm
Max. height	200 cm
Max. area	2 m ²
25 mm slats	
Min. width	27 cm
Max. width	150 cm
Max. height	200 cm
Max. area	2 m ²


BUNCH HEIGHTS

16 mm slats	
Installation height	Bunch height
100 cm	ca. 8.5 cm
150 cm	ca. 10.5 cm
200 cm	ca. 11.5 cm
230 cm	ca. 12.5 cm
25 mm slats	
Installation height	Bunch height
100 cm	ca. 8.5 cm
150 cm	ca. 10.0 cm
200 cm	ca. 10.5 cm
250 cm	ca. 13.0 cm


25 mm slats	
Installation width	Number of handles
Up to 900 mm	1
From 901 mm	2

Chain

KV 16 (slats 16 mm)
KV 25 (slats 25 mm)

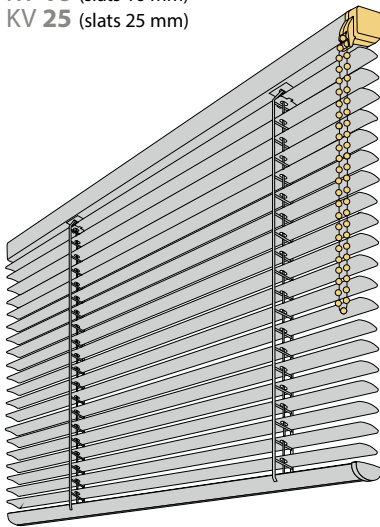


OPERATION OPTIONS




Motor 24 V


MO 16 (slats 16 mm)
MO 25 (slats 25 mm)
VM 25 For coupled windows

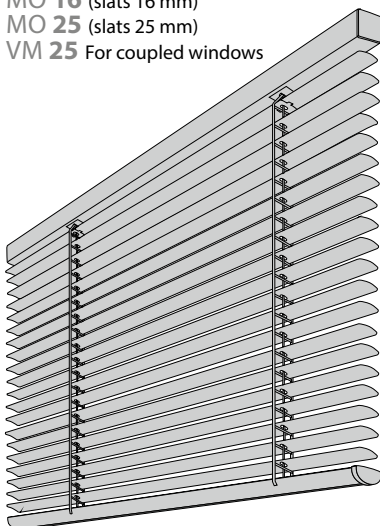

CABLE EXIT




Basic Line 16

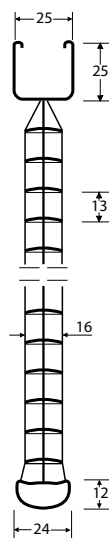

- Customization
- Slat width 16, 25 mm
- Slat thickness 0.22 mm
- Free-hanging installation with fixed top profile and adjustable bottom profile
- Chain operation (chain exit front)
- Gear 3 : 1, option: 1:1
- Gear colour: white, light grey, black
- Operating side left or right
- Control lengths in 20 cm steps from 60 to 600 cm
- Colour-matched top / bottom profiles
- Colour-matched cords, plastic parts
- Chain colour: transparent, white, black, grey
- Nickel chain for an extra charge
- Lifting cord 1.4 mm
- Top fixation with wall / ceiling fixing bracket with quick-lock
- Cord guiding for an extra charge

Basic Line 25

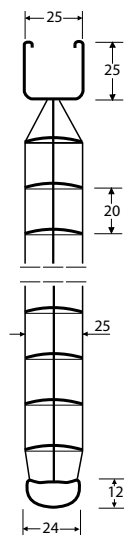

- Customization
- Slat width 16, 25 mm
- Slat thickness 0.22 mm
- Free-hanging installation with fixed top profile and adjustable bottom profile
- Motor operation (motor inside the top profile)
- Direct current motor 24 V, power consumption ca. 15 W
- 230 V / 24 V power supply unit required
- Cable exit left or right
- Operation, e.g. switch, radio, group control
- Colour-matched top / bottom profiles
- Colour-matched cords, plastic parts
- Lifting cord 1.4 mm
- Top fixation with wall / ceiling fixing bracket with quick-lock
- Cord guiding for an extra charge

RANGES OF SIZE

16 mm slats

Min. width	32 cm
Max. width	45 cm
Max. height	200 cm
Min. width	46 cm
Max. width	270 cm
Max. height	260 cm
Max. area	6 m ²

25 mm slats

Min. width	32 cm
Max. width	45 cm
Max. height	200 cm
Min. width	46 cm
Max. width	330 cm
Max. height	300 cm
Max. area	6 m ²

BUNCH HEIGHTS

16 mm slats

Installation height	Bunch height
100 cm	ca. 8.5 cm
150 cm	ca. 10.5 cm
200 cm	ca. 11.5 cm
250 cm	ca. 12.5 cm

25 mm slats

Installation height	Bunch height
100 cm	ca. 8.5 cm
150 cm	ca. 10.0 cm
200 cm	ca. 10.5 cm
250 cm	ca. 13.0 cm
300 cm	ca. 14.0 cm

RANGES OF SIZE

16 mm slats

Min. width	65 cm
Max. width	270 cm
Max. height	260 cm
Max. area	5 m ²

25 mm slats

Min. width	65 cm
Max. width	330 cm
Max. height	300 cm
Max. area	5 m ²

BUNCH HEIGHTS

16 mm slats

Installation height	Bunch height
100 cm	ca. 8.5 cm
150 cm	ca. 10.5 cm
200 cm	ca. 11.5 cm
250 cm	ca. 12.5 cm

25 mm slats

Installation height	Bunch height
100 cm	ca. 8.5 cm
150 cm	ca. 10.0 cm
200 cm	ca. 10.5 cm
250 cm	ca. 13.0 cm
300 cm	ca. 14.0 cm